

PCB Power Filters FM Series (metal case)



Miniature Printed Circuit Board

Applications



- Personal computers and peripherals
- Digital equipment
- Measuring instruments and medical equipment
- TV & VCR monitors and display units
- Home applications.

Circuit Diagram

FMxxx Series

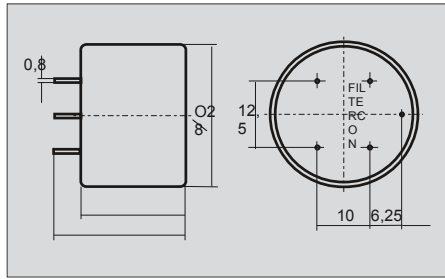


1FMxxx Series

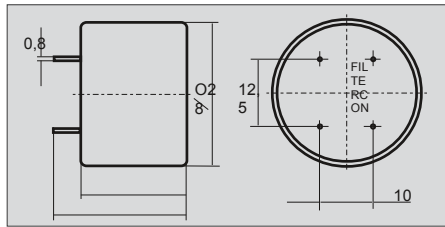

Circuit Diagram




1FMxx Series



Model	U (V)	I (A)	Cx(nF)	Cy(nF)	L(mH)
FM105-0	250V AC	0,5	10	2,2	
FM315-0, 1FM315-0			47		
FM415-0, 1FM415-0R			100		
FM104-1	250V AC		10	2,2	
FM314-1, 1FM314-1			47		
FM414-1, 1FM414-1R			100		
FM102-2	250V AC		10	2,2	
FM312-2, 1FM312-2			47		
FM412-2, 1FM412-2R			100		
FM101-4	250V AC		10	2,2	0,5
FM311-4, 1FM311-4			47		
FM411-4, 1FM411-4R			100		

Model	U (V)	I (A)	Cx(nF)	L(mH)
1FM35-0	250V AC	0,5	47	
1FM45-0R			100	
1FM34-1	250V AC		47	
1FM44-1R			100	
1FM32-2	250V AC		47	
1FM42-2R			100	
1FM31-4	250V AC		47	0,5
1FM41-4R			100	

Asymmetrical

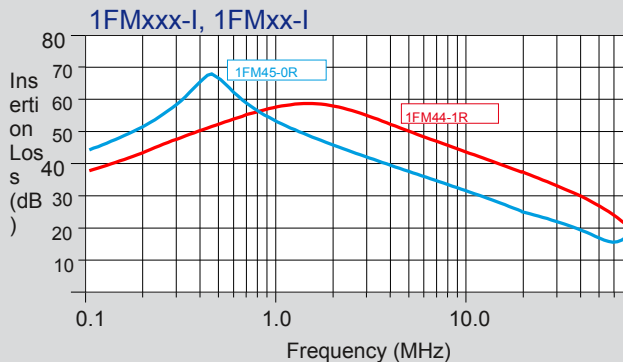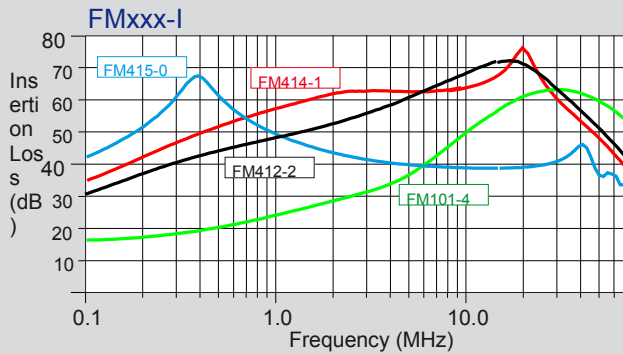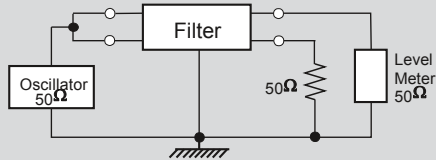

Symmetrical

