


9111 Series

H.D. 2.0mm(0.079") Futurebus(+)5 Rows Female Right Angle Type

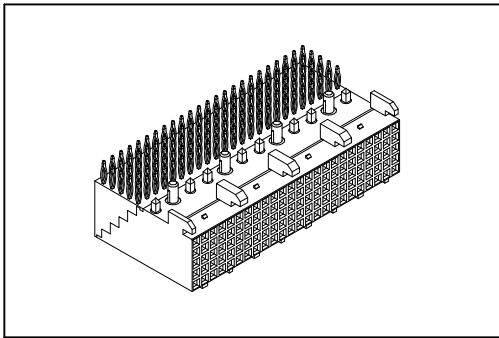

Material:




Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000M Ω min.
Contact Resistance: 30m Ω max.
Operating Temperature: -65°C ~ +125°C.

Features:


- * 2mm high density futurebus+ female right angle solder and press fit type.
- * Available pin count from 30~390.
- * Side by side stackable.
- * Push-Fit peg.

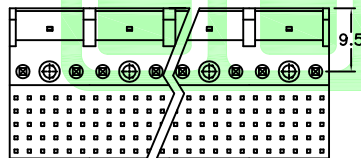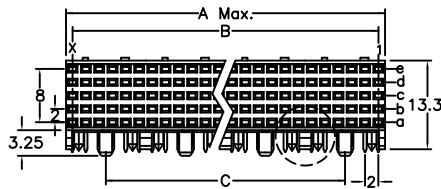

Dip Type



Press Fit Type

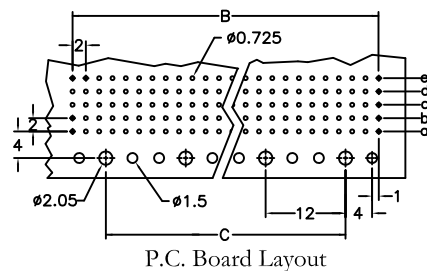

X Length	1	2	
	2.90	3.53	
Position	Dimension		
	A	B	C
30	11.95	10	
60	23.95	22	12
90	35.95	34	24
120	47.95	46	36
150	59.95	58	48
180	71.95	70	60
210	83.95	82	72
240	95.95	94	84
270	107.95	106	96
300	119.95	118	108
330	131.95	130	120
360	143.95	142	132
390	155.95	154	144

Ordering information

9111- 5 2 30 1
Series 5: 5Rows 2: Female Position 1: Dip Length
Signal 2: Dip Length

C 10 D
C: Dip Tin Contact Gold 10: 10 μ "
G: Gold 30: 30 μ "

D U
D: Dip Type P: Press Fit Type
U: Tube Package