

1

2

3

4

SPECIFICATION


受 控

1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION (at 25°C)

2.1 Resonant Frequency	:	2.2 ± 0.5 KHz
2.2 Resonant Resistace	:	800 Ω max
2.3 Capacitance	:	70000 pF ± 30% at 100Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20~+75°C
2.6 Storage Temperature	:	-30~+85°C
2.7 Insulation Resistance (at 25VD.C.)	:	50M Ω min.
3. DIMENSION	:	as per figure

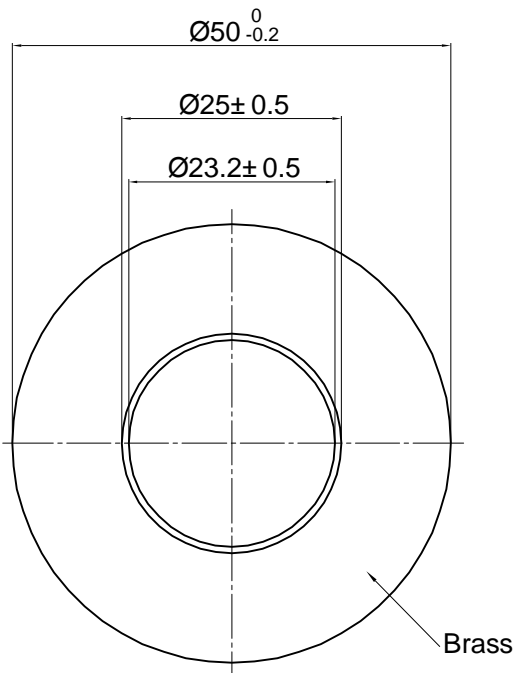


TOLERANCES UNLESS NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

DESIGN

CHECKED

APPROVED

DATE

05.08.09

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

FT-50T-2.2A1

DWG NO.

KP3.845.775

Ningbo Kepo Electronics Co.,Ltd.

CUSTOMER:

CUSTOMER NO.

VER

1.0

SCALE

UNIT

mm

SHEET

TEL:(+86)574-88370330

FAX:(+86)574-88370329

1

2

3

4