

## SPECIFICATIONS

### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

### Electrical




Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.


Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

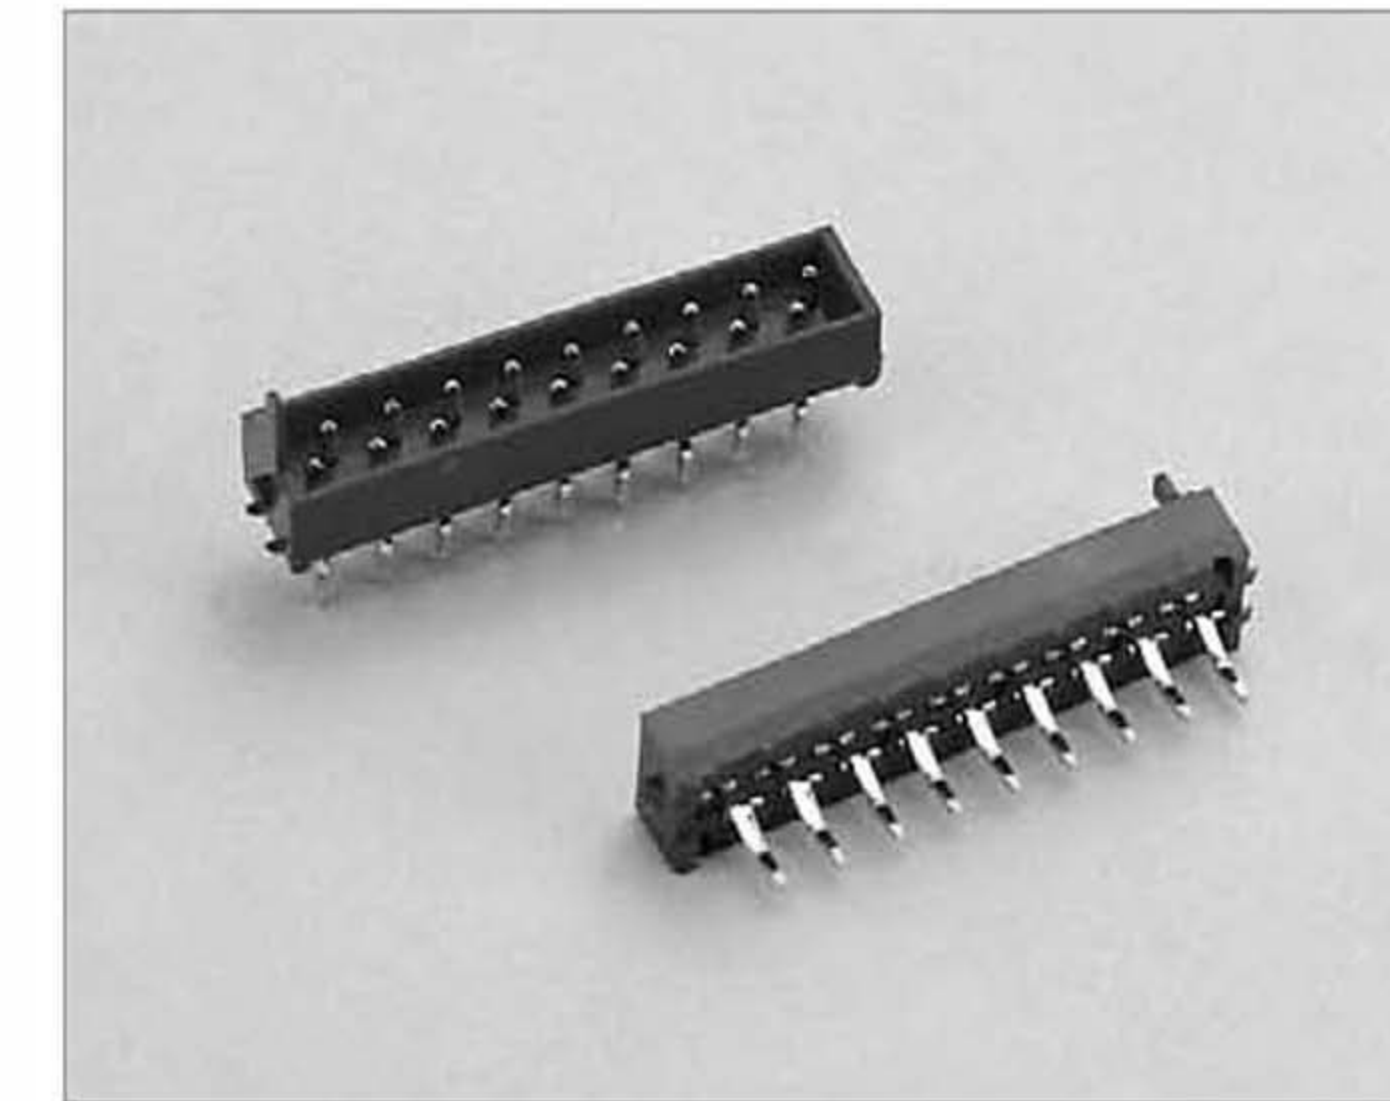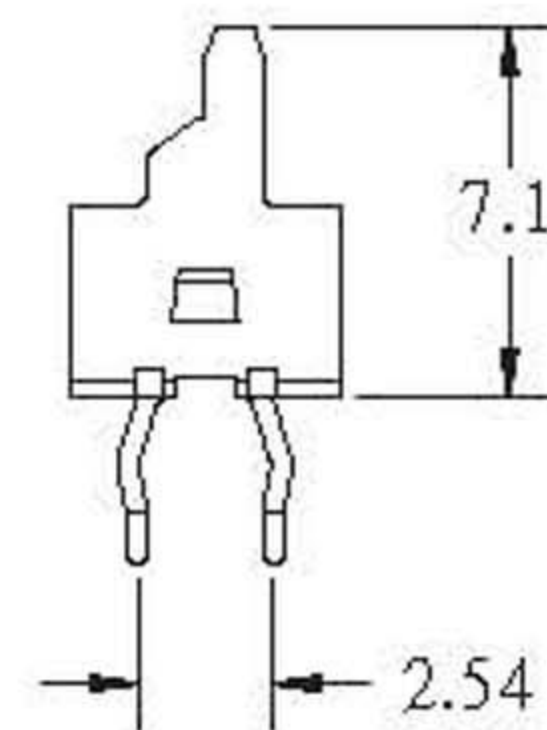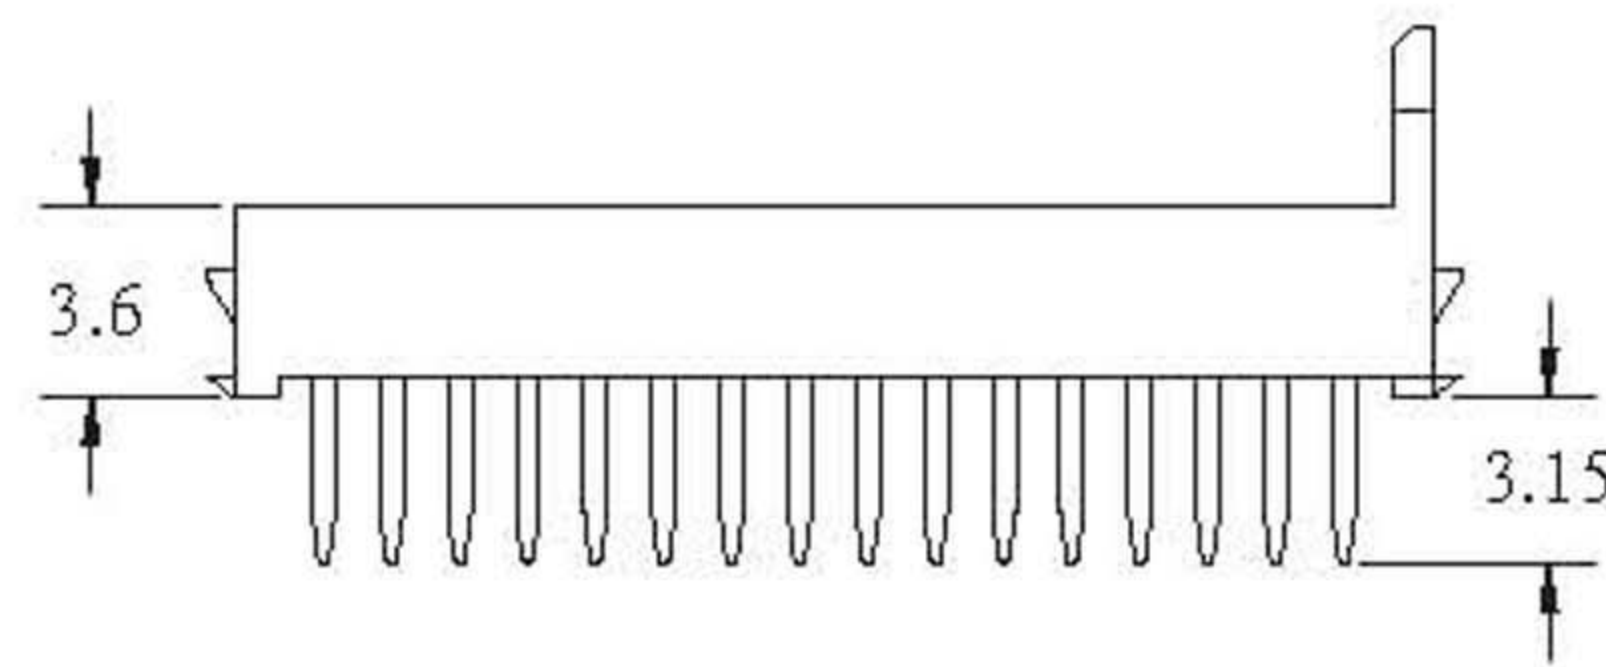

POSITION	A	B
4	8.46	3.81
6	11.00	6.35
8	13.54	8.89
10	16.08	11.43
12	18.62	13.97
14	21.16	16.51
16	23.70	19.05
18	26.24	21.59
20	28.78	24.13
22	31.32	26.67
24	33.86	29.21
26	36.40	31.75

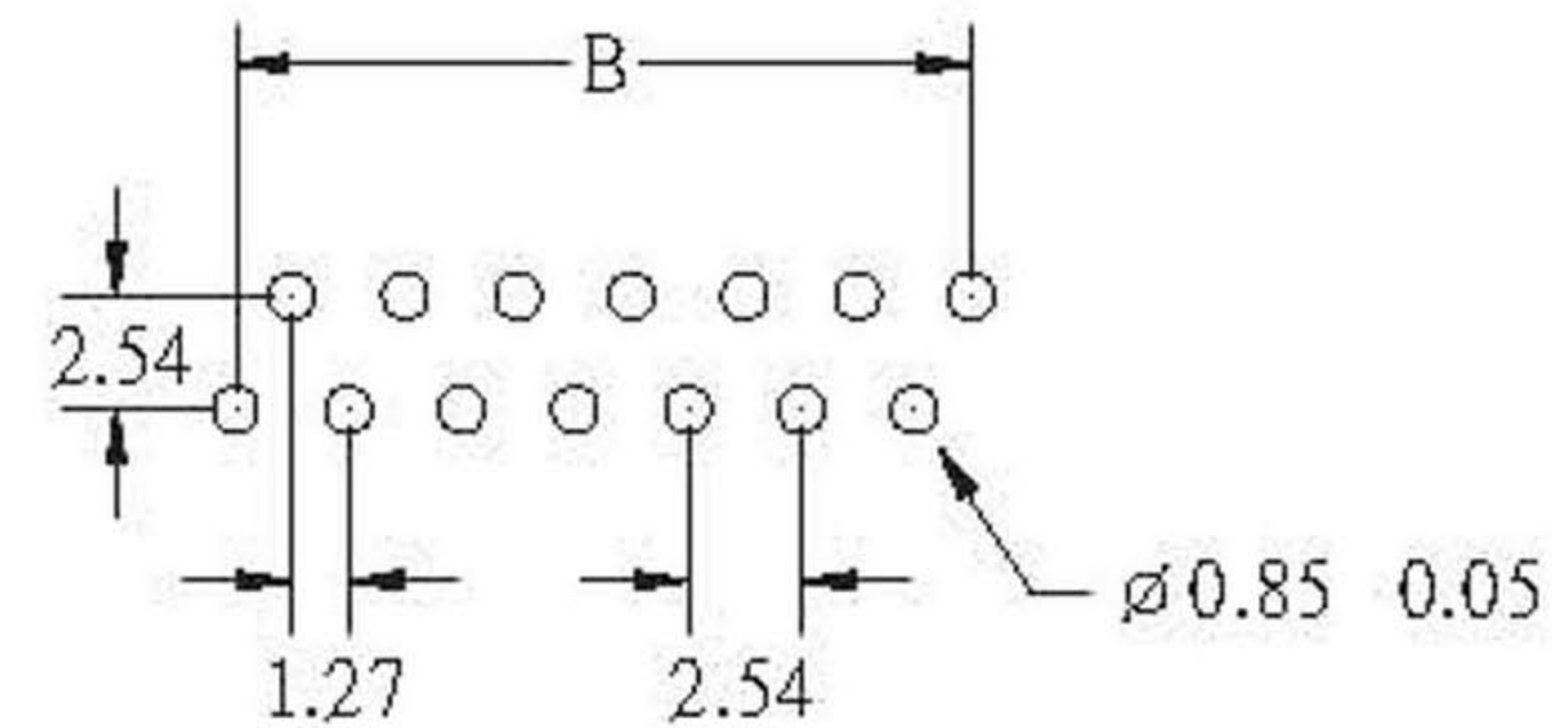

RECOMMENDED P.C.B LAYOUT