




DEGSON ELECTRONICS CO., LTD.

Product Specification




Approval		
Electrical	UL	IEC
Standard	300V	250V
Rated voltage	15A	24A
Rated current	22-14AWG	2.5mm ²
Wire range	AC2500V/1Min	
With standing voltage	500MΩ/DC500V	
Insulation Resistance		
Mechanical		
Max. Torque Value	0.8N.m 7.0Lb.in	
Ambient temperature	-40°C ~ +105°C	
Dimensions		
Pitch	9.52mm (.375")	
Poles	2*(5P-18P)	
Material		
Housing	PA66+23%GF, UL94V-0	
Terminal	Brass, 0.8t Tin plated	
Screws	Steel, M3.5 Ni plated	

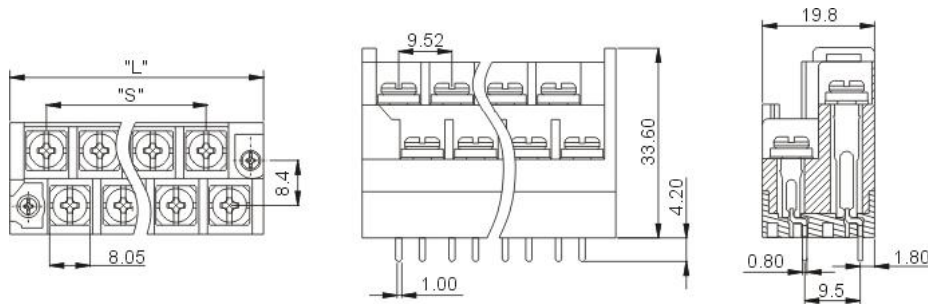

"S" = 9.52x(P/2-1)

"L" = 9.52x(P/2-1) + 17.08

HOW TO ORDER :

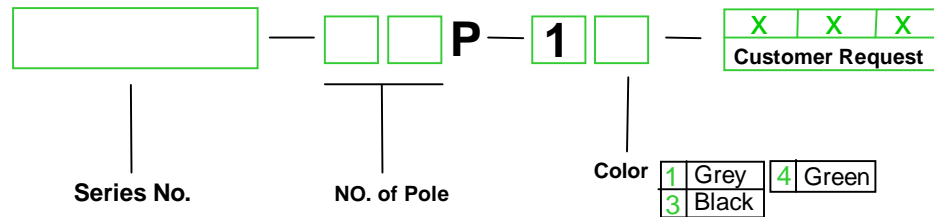

Poles	4	6	8	10	12	14	16	18	20	22	24	26	28	30
L(mm)	26.60	36.12	45.64	55.16	64.68	74.20	83.72	93.24	102.76	112.28	121.80	131.32	140.84	150.36
S(mm)	9.52	19.04	28.56	38.08	47.60	57.12	66.64	76.16	85.68	95.20	104.72	114.24	123.76	133.28
Poles	32	34	36	38	40	42	44	46	48					
L(mm)	159.88	169.40	178.92	188.44	197.96	207.48	217.00	226.52	236.04					
S(mm)	142.80	152.32	161.84	171.36	180.88	190.40	199.92	209.44	218.96					

	DEGSON ELECTRONICS CO., LTD.
	NAME DG44B-1