
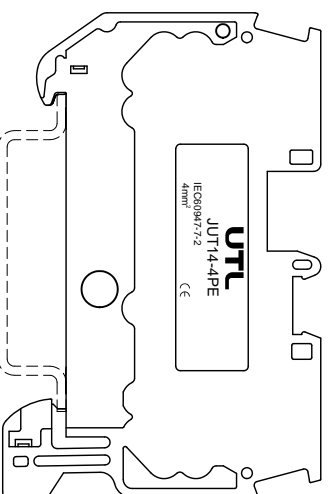
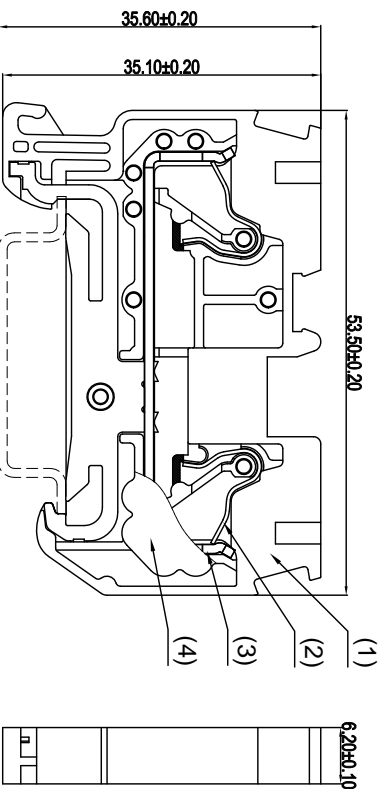


REV.	EQ. NO.	REVISION	REVISOR	APPD.
版次	EQ. 编号	外数	修订者	核准
R1	DRAWING			



### Technical Data

**Material:**

Body: PA66 UL94 V-0.

Conductor: Copper, Tin Plated.

Spring: SUS 301.

**Electrical:**

Current rating: 32 A;


Contact resistance: 20 mΩ Max.

**Mechanical:**

Connection Capacity: 24-12AWG.

Stripping Length: 12mm.

Operating temperature: -45° C to +105° C.

 <b>ZHEJIANG UTILITY ELECTRICAL CO., LTD</b> <b>浙江尤提乐电气有限公司</b>		<b>TYPE NO.</b>	JUT14-4PE	<b>TITLE</b>	名称: Customer Drawing
		<b>APPD.</b>		<b>DWG. NO.:</b>	图号: C-DW2000-0
<b>CHKD.</b>		<b>SCALE:</b> FULL		<b>PAGE:</b> 1/1	
<b>DR.</b>	Jammy. ling	<b>UNIT:</b> mm[inch]		<b>REV.:</b> R1	
<b>MATL</b>	材质:	<b>ANGLE</b>	±1°		
>120	±0.50				
>30~120	±0.30				
>6~30	±0.20				
0~6	±0.10				