

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

- 1. Rated voltage/current : 600V / 150A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M6 , 2.2-2Lb.in
- 4. Wire range : 18~1/OAWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	1000V
Rate current(A)	125A



- 2. Torque value : M6 , 2.5N·m
- 3. Wire range : 0.2~35mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 15.2mm, Poles : N=01P
- 3. Stripping length : 16~17mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In		Nominal Dimension		Range		D
	mm	In	mm	In	mm	In	
6	Over	10	Over	30	Over	100	Over
	TO	10	TO	30	TO	100	TO
10	Over	24	Over	60	Over	150	Over
	TO	24	TO	60	TO	150	TO
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

6. RoHS Compliance

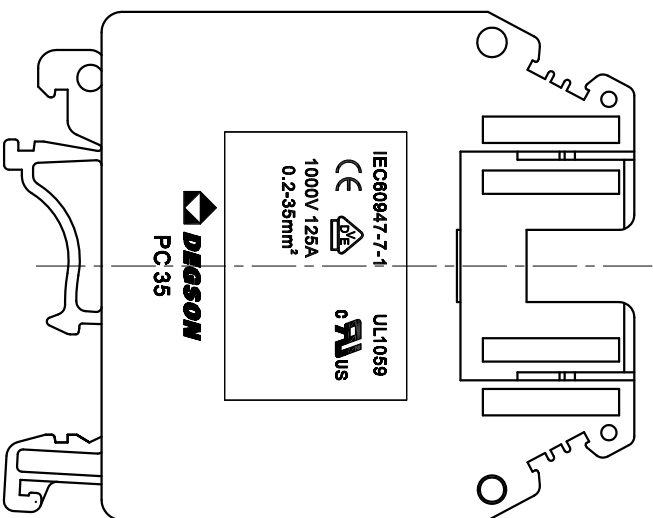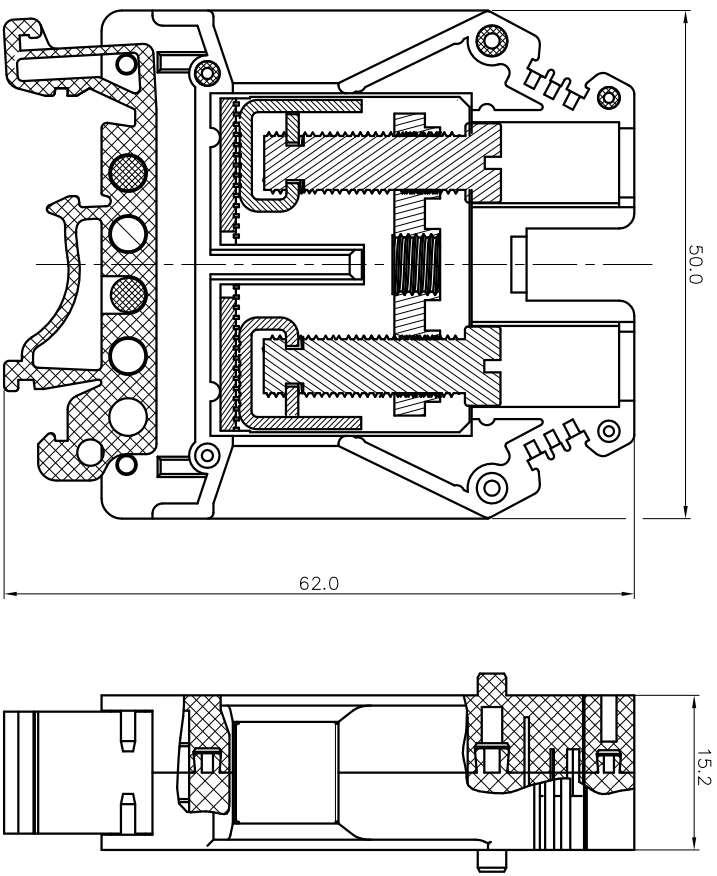

PC35 - 01P - 1Y - 00A (H)
 (RoHS)
 00A - (Standard)
 (Series No.) (Poles) (Single Pitch) (Color): 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

DETACHED LISTS		NAME:	
PART NO.:	/	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:	/	宁波高松电子有限公司	
CHKD:	/	PC35-01P-1Y-00A(H)	
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A 8 7 6 5 4 3 2 1