



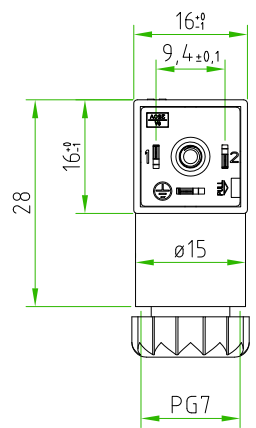





Rev.	Modify	Date	Signed	Approved

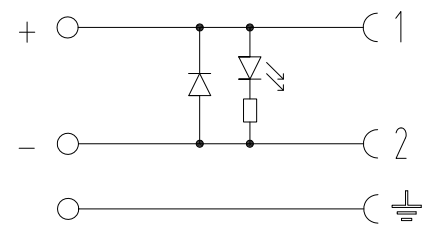

CONTACTS WITH SOLDER ZONE



SPRING CONTACTS



PRODUCT TYPE	SQUARE MICRO INDUSTRIAL STANDARD FORM C FIELD ATTACHABLE.
HOUSING MATERIAL/COLOUR	PA66 / TRASPARENT
PRESS-CABLE MATERIAL/COLOUR	PA66 / BLACK
INTERNAL CORE MATERIAL/COLOUR	PA66 / BLACK
HEIGHT HOUSING	26mm
CONTACTS SPACING	9,4mm
CONTACTS TYPE	SCREW CONTACTS(with protection plate)
NUMBER OF POLES	2POLES+EARTH
EARTH POSITIONING	H.6 (TURNABLE)
CABLE EXIT	PG7
SUITABLE CABLE	FROM ø4mm TO ø6mm
MAX.CONDUCTOR SIZE	0,75mm ²
PROTECTION CLASS	IP67
CIRCUIT TYPE	RED LED+DIODE (1A)
RATED VOLTAGE	24V DC
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
GASKET TYPE	PROFILED NBR
FIXING SCREW	M3X0,5 L=28mm
CONNECTOR WITH H.T.P. LOGO	

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

A4

Designer	SUGLIANI R.	Date	2017-07-26	Tolerance	±0,3	Units:	mm	Series	INDUSTRIAL STANDARD (form C)	Drawing n.	1/1
Approved	CIMMINO L.	Date	2017-07-26	Scale	1:1	Size:	A4	Customer code:			



DESCRIPTION
 SQUARE MICRO CONNECTOR INDUSTRIAL STANDARD (form C),FIELD ATTACHABLE, 2P.+PE, WITH RED LED+DIODE(1A), 24V DC, TRASPARENT HOUSING, PG7. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER
 P2TZ2DL1