

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- 1. Rated voltage / current : 600V / 30A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M3 , 4.43Lb.in
- 4. Wire range : 24~10AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	800V
Rate current(A)	32A




- 2. Torque value : M3 , 0.5N·m
- 3. Wire range : 0.2~4mm<sup>2</sup>

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 6.2mm, Poles : N=01P
- 3. Stripping length : 7~8mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In mm		Nominal Dimension		Range	D	E
	Over	Under	Over	Under			
6	10	6	10	6	100	150	±
	10	10	10	10	100	150	
±0.15±0.20	±0.30	±0.30	±0.50	±0.50	±1.00	±1.30	±Z*
	±0.30	±0.30	±0.50	±0.50	±1.00	±1.30	

6. RoHS Compliance

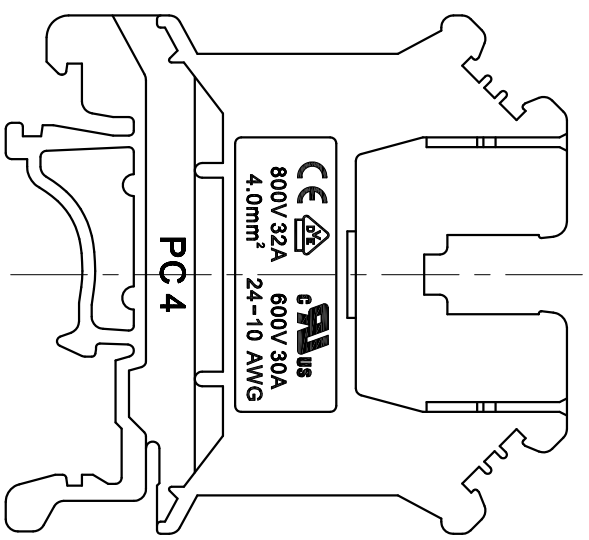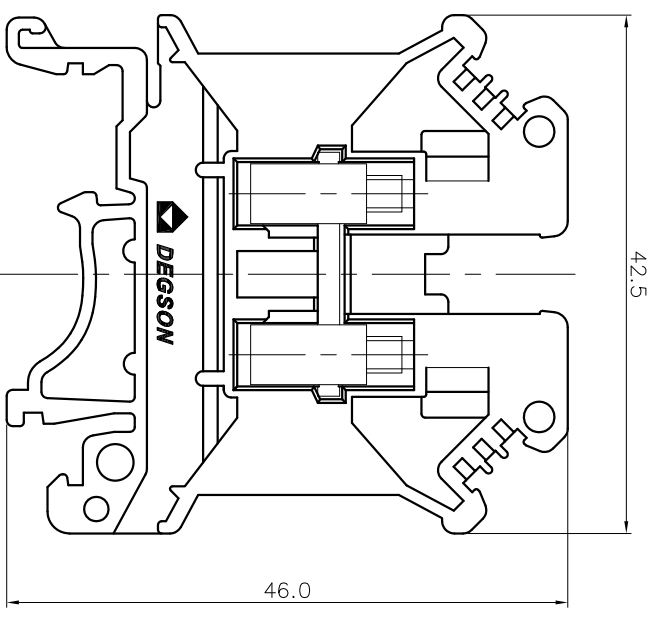

PC4 -- 01P -- 1Y -- 00A (H)  
 (RoHS)  
 00A--(Standard)  
 (Series No.) (Poles) (Single Pitch) (Color):

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	APPD:	NINGBO DEGSON ELECTRICAL CO., LTD
CHKD:	/	CHKD:	NINGBO DEGSON ELECTRICAL CO., LTD
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1