





DEGSON ELECTRONICS CO., LTD.

Product Specification

CE



PC 10-DR

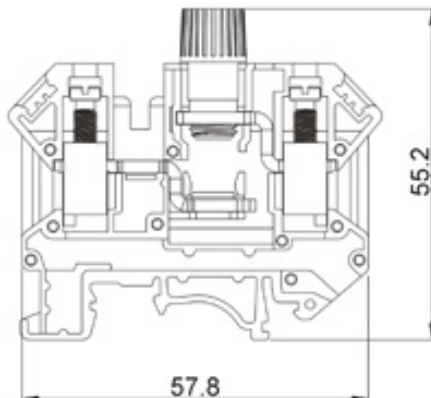

Capability			
Approval			
Standard	UL	IEC	
Rated Voltage	600V	800V	
Rated Current	10A	10A	
Wire size	20-6AWG	0.5-16mm ²	
T/W/End plate		12/62/-mm	
Height _{mm} (NS35:7.5/NS35:15/NS32)		59/66.5/64mm	
Rated Surge Voltage/Contamination Class		4kV/3	
Stripping Length		11mm	
Screw Thread/Tightening Torque		M4/1.2N.m/10.5Lb-in	
Internal Cylindrical Gage		B6	
Insulating Material/Inflammability Class		PAV-0	
Specification		Model	Pieces
(1) Fuse Terminal Block, The Spec. Of Fuse: 5×20.5×25, 6.3×32mm		PC10-DR	50
(2) End Cover		D-PCIK4/10	50
(3) Fixed Bridge	2-P 3-P 5-P 10-P		FBI 10-12
(4) Step Bracket			
(5) Insertion Bridge	2-P 3-P 10-P		EB 10-12
(6) Isolator Bridge Bar, 10 P			
(7) Bridge Bar Isolator			
(8) Switching Bridge			
(9) Separating Plate			
(10) Separating Plate, Width:1.5mm			
(11) Test Plug Socket			PSB 4/7/6
(12) Test Plug Socket, Insulated			PSBJ 4/15/5
(13) Zack Strip			ZB6

HOW TO ORDER:

PC 10-DR — P — 1 —

Series No. No. of Pole Color Customer Request

1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

	DEGSON ELECTRONICS CO., LTD.
	NAME PC 10-DR